


SRH 4" DEFLECTION ISOLATION HANGERS

IP UNITS (INCHES AND POUNDS)

TYPE	L	H	W	A	B	Dmax
4-2250/2750	3.52	18.50	13.50	6.00	8.00	0.88

STANDARD RATINGS				SPRING COIL				INSERT COLOR
TYPE	SIZE	LOAD	DEFL.	COLOR		FREE HT.	O.D.	
				OUTER	INNER			
SRH	4-2250	2250	4.53	BEIGE		11.50	8.00	PINK
SRH	4-2500	2500	4.59	BEIGE	BLUE	11.50	8.00	PINK
SRH	4-2750	2750	4.65	BEIGE	GREEN	11.50	8.00	PINK

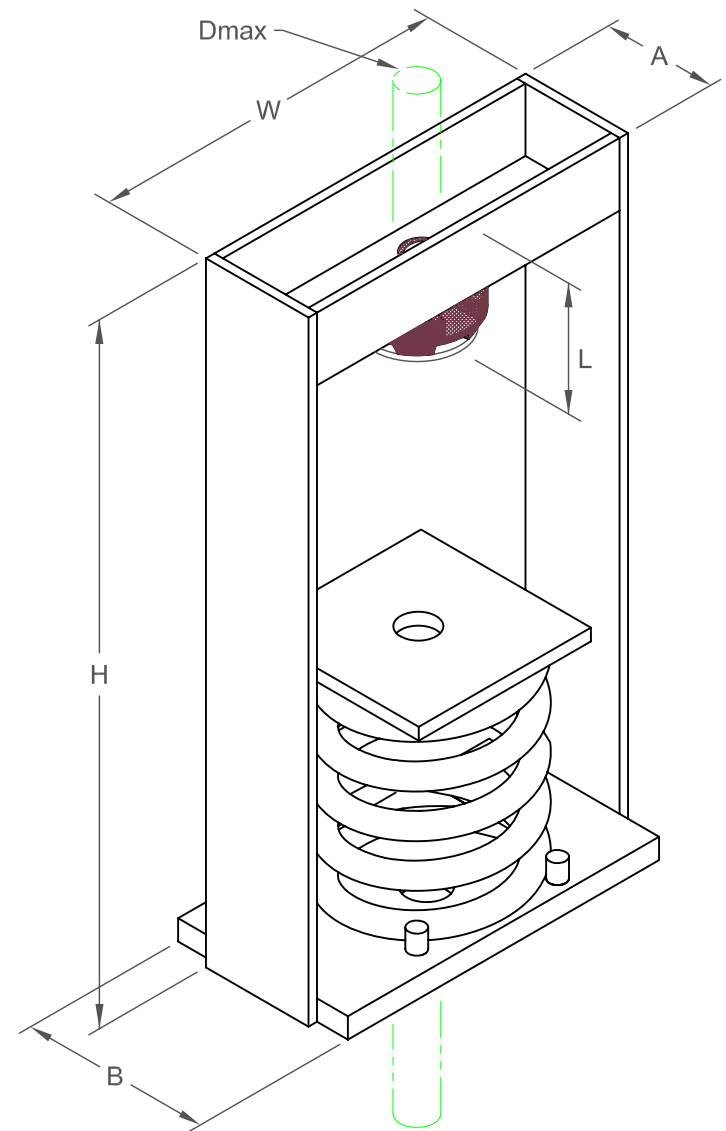

SPECIFICATIONS:

- SPRING ELEMENTS AND BRACKETS ARE POWDER COATED
- LOAD PLATES ARE BRIGHT ZINC PLATED
- ISOLATION HANGERS HAVE A MINIMUM K_x/K_y RATIO OF 1.5
- SPRING ELEMENTS ARE SAFE AT SOLID LOADING
- HANGER BRACKETS WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE
- HANGER BRACKETS WILL ALLOW 30° ROD MISALIGNMENT WITHOUT SHORT CIRCUITING



KINETICS NOISE CONTROL, INC
6300 IRELAN PL,
DUBLIN, OH 43017 USA
Ph: 614 889-0480, Fax: 614 889-0540
www.kineticsnoise.com

Model:
SRH
4-2250/2750

By: JMJ
Date: 11/3/03
Revised: /

Drawing No:
S-03.37-42